

Fountains of Living Waters, Inc.

Fountain Installation Instructions For All Wall Fountains



Majestic Falls – Yellowstone



Desert Mirage



Valentino





Just to name a few....

Fountains of Living Waters, Inc.
2320 Thompson Way, Unit B
Santa Maria, CA 93455
805-349-8442 – www.livingwatersfountains.com

These Instructions show you:

- **How To Make Sure You Have Everything You Need To Install Your New Fountain.**

TOOLS NEEDED
<ul style="list-style-type: none">• Phillips® Head Screw Driver (Power Screw Driver Optional)• Level• Pencil

A THE COMPONENTS	
You will receive a fully assembled fountain, a Wall bracket, and the hardware to install it.	
 <p>Fountain</p>	 <p>Wall Bracket</p>  <p>EZ Anchors</p>  <p>Stainless screws</p>

Maintenance and Operation Techniques

1. Distilled Water is recommended. Hard water contains minerals, and after time, they will begin to leave unsightly deposits on the face of your fountain. Should this happen, turn off the pump. Cover water pan with plastic. Add a few capfuls of CLR® to a gallon of water. With gloves and a soft sponge, wipe off the face of the fountain. It may take several minutes to remove the stains. Once they are gone, wipe face of fountain with clear water. Refill basin, and plug pump back in.
2. We recommend that these run 24/7. The water is pumped by an aquarium type pump. They are manufactured to run 24/7. They pull very little electricity, about the same amount needed to run a night light.
3. A soft cloth and some furniture polish for the copper fountains, or stainless steel cleaner for the stainless steel models is all that is needed to keep the fountain looking beautiful. Just run the cloth over the exposed framing once a week.
4. The water pan should be filled within 1 inch from the bottom of the fountain face. This will adequately keep the pump submerged. **NEVER** let your fountain run dry! It will burn out your pump. That type of damage is not covered by the Manufacturer's warranty.
5. Should you have any problems with your Pump, You **must** contact the pump manufacturer directly. Please refer to Pump information insert that came with your fountain. The pumps carry a three Year Limited Manufacturer's Warranty. Please read pump insert for more information. Fountains of Living Waters cannot replace pumps.
6. Fountains of Living Waters recommend replacing the water in your fountain every 3 months.

B Installing your wall fountain

1. Hold the wall bracket up to the desired height. The top of the light valance is approximately 6-1/2" above the top of the wall bracket. Check to make sure the bracket is level and mark holes.



2. Remove the wall bracket and insert the provided EZ Anchors™. **You must use the provided EZ Anchors™. Plastic anchors are not an acceptable substitute.** If you are mounting the fountain to a stud, do not use an EZ Anchor™.

3. Once you have installed the EZ Anchors, place the wall bracket over the corresponding holes and using the Stainless screws provided, mount the bracket to the wall. Before tightening the screws completely, check the level again of the wall bracket. Once your satisfied with the level go ahead and tighten the screws.



4. Remover the dispersment cover and the splash guard from the fountain and set aside. Your wall fountain has been equipped with a frame bracket, simply lift the fountain above the wall bracket and lower it onto the wall bracket and center it.



5. Check to make sure that the fountain is seated on the bracket and that its centered.



6. Fill the pan with Distilled water 1" from the bottom of the fountain face.



7. Plug your fountain in for just a few seconds and then unplug it. This will allow the water to push any air out of the pump cavity. Plug your fountain in again and allow the water to start cascading over the top of the dispersment





8. Use the scotch brite pad (provided) and rub the top dispersment from side to side to insure that the water cascades evenly down the face of the fountain.



9. Once the water is cascading down the face of the fountain, install the disbursement cover by setting it behind the Light Valance and lowering it onto the disbursement. There are two tabs on the cover that will rest on the face of the fountain.



10. Install your splash guard on the tabs located on the lower frame above the pan, one side at a time. Then wipe up any water spots and...

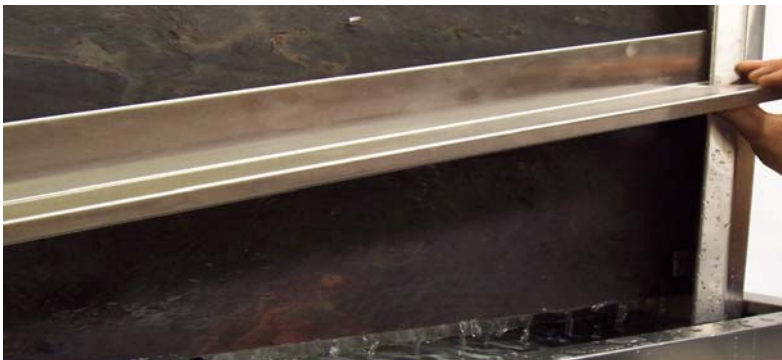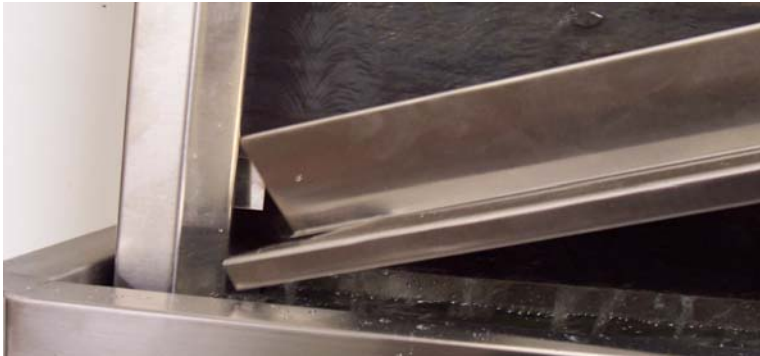

Enjoy Your Fountain!!